

Safe Way Traction Deck Strips

Safe Way Traction's Deck Strips provide slip resistance, durability and a permanent anti-slip solution on any structurally sound surface, such as inclines, floors, steps and decking.

These grit-coated, fiberglass reinforced plastic (frp) deck strips are extremely durable, customizable, lightweight and coated with a *proprietary blend* of mineral abrasive epoxy grit.



For industrial or commercial applications, we recommend our Heavy Duty or Medium grit strips which are available in Yellow or Black.

For residential or recreational installations, Safe Way Traction recommends our Lite or Fine grit strips. Suitable for barefoot traffic, these are available in 7 popular colors: Pool blue, Tan, Brown, Grey, White, Yellow and Black.

Deck strips are available in 24 inch, 36 inch, 48 inch, 60 inch and 96 inch lengths.



Made in the USA

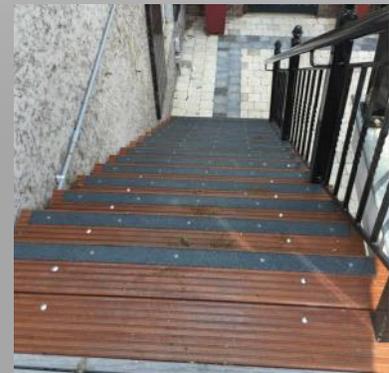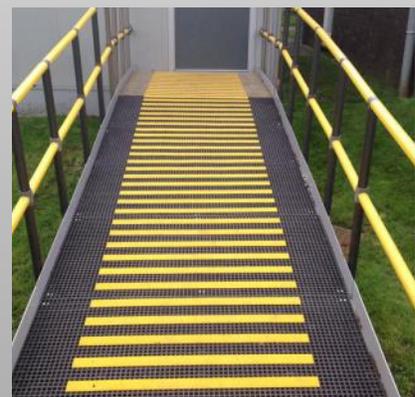

For more information or to place an order, contact one of our safety professionals today!



6817 Hobson Valley Drive, #114
Woodridge, IL 60517
630-948-4740 www.SafeWayTraction.com

Safe Way Traction Deck Strips

INSTALLATION GUIDE

PREPARATION

- ◆ Deck strips are not a weight bearing material and should only be applied to sound structures.
- ◆ Fill any cracks, holes or depressions prior to installation.
- ◆ Surfaces should be clean, dry and free from oil, grease, rust or any other foreign surface.
- ◆ It is recommended that any painting or refinishing of surface be completed prior to installation.

MATERIALS REQUIRED

- ◆ Appropriate personal protection equipment: safety glasses, dust mask, gloves, ear protection, etc.
- ◆ Tape measure, marking tool
- ◆ Drill with proper bit size
- ◆ Sandpaper, acetone, de-natured alcohol
- ◆ Adhesive sealer and fasteners (*#10 stainless-steel truss screw recommended*)

HOW TO INSTALL


- ◆ Install deck strips on any structurally sound, clean, smooth and dry surface.
- ◆ Use a combination of adhesive and mechanical fasteners to ensure a safe and secure installation. If necessary, use proper anchor to achieve fastening to surface.
- ◆ Determine placement of deck strips - side and edge holes should be predetermined and should not exceed a spacing of 18 inches between holes. Safe Way recommends a spacing of 12 inches on center on highly traveled areas.
- ◆ Using proper drill bit size, drill pilot holes through the deck strip into the surface.
- ◆ Using sandpaper, lightly scuff the underside of the deck strip and remove surface dust by wiping with de-natured alcohol and allow to dry. This will assist in creating a proper bond with the adhesive.
- ◆ Apply a 1/2 inch to 3/4 inch bead of adhesive to the underside of the deck strip around the entire perimeter, being careful not to get too close to the edges. Do not apply adhesive over the pre-drilled holes.
- ◆ Position the deck strip, carefully aligning the pre-drilled holes with the pilot holes.
- ◆ Insert appropriate screw and tighten.
- ◆ Clean any excessive adhesive as recommended by the sealant manufacturer.

MAINTENANCE

Deck strips can be cleaned by sweeping, using a general purpose industrial floor cleaner, stiff bristled brush or pressure sprayed up to 1000 psi.

SPECIFICATIONS

Mineral abrasive epoxy grit-coatings are applied over thermoset polyester fiber, reinforced polymer panels. Prior to grit coating, 0.125 inch thickness transitions down on both sides to .065 inch thickness.

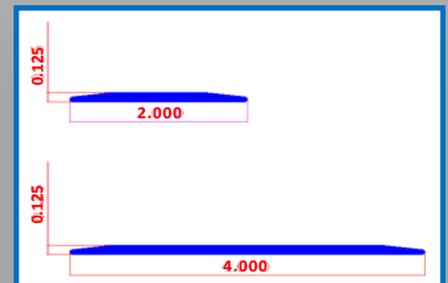

To learn more about other anti-slip products, applications, install instructions and technical questions, contact one of our safety experts at 630-948-4740 or visit www.SafeWayTraction.com.